



HYDRAULIKVENTILECHNOLOGIE

HVT Non-Return Valve Type 260

Performance data

Max. pressure	210 bar
Opening pressure	0,07 bar - 5 bar, adjustable or permanently set
Flow	< 4 l/min @ 1 bar delta
Internal leakage	< 1 ml/min


This pressure control valve is ideal for virtually all applications in hydraulics and pneumatics thanks to its robust design and construction. The Non-Return valve is a preassembled valve to prevent Backflow or returning pressure peaks in hydraulic systems. The valve is supplied ready for insertion (cartridge) without any mounting and/or sealing elements.

All components in contact with media are manufactured of stainless steel. The steel-on-steel valve seat seal design guarantees a long service life.

Other versions available on request.



Figure approx. actual size

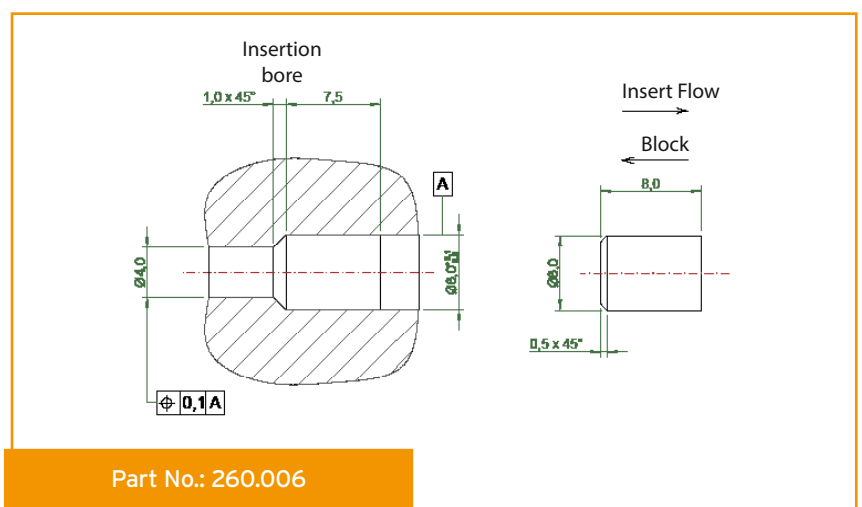

Part No.: 260.006